

553065

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/064792 A1

(51) International Patent Classification⁷: H03J 1/00, 9/06

(72) Inventor; and

(75) Inventor/Applicant (for US only): KIMURA, Akira.

(21) International Application Number:

PCT/JP2004/019483

(74) Agents: IWASHI, Fumio et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(22) International Filing Date:

20 December 2004 (20.12.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(26) Publication Language:

English


(30) Priority Data:

2003-429439 25 December 2003 (25.12.2003) JP

[Continued on next page]

(71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(54) Title: REMOTE CONTROLLER

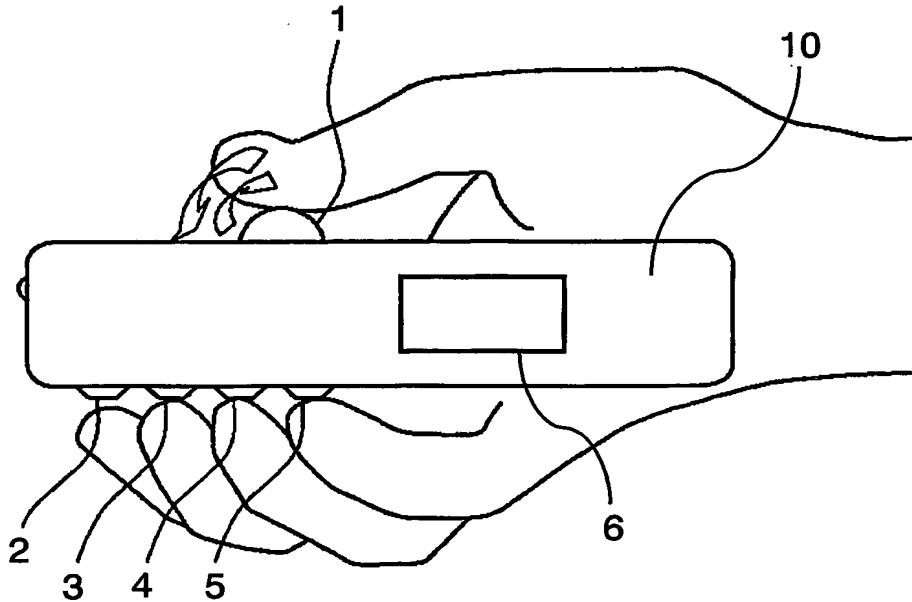

WO 2005/064792 A1

(57) Abstract: A remote controller easy to manipulate and a device to be controlled by the remote controller are provided. The remote controller includes: a switching means for selecting one of a plurality of options in one dimension out of control items laid out in a plurality of dimensions, an item selecting means for selecting one of a plurality of options in another dimension out of the control items laid out in the plurality of dimensions. The remote controller transmits a remote control code in accordance with an output of the switching means and n output of the item selecting means. The device to be controlled by the remote controller is provided with a displaying means for showing the control items in accordance with a signal from the remote controller. Every time the first remote control code is transmitted, the displaying means displays control items selectable by the item selecting means for a certain period of time.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*